

WISP Supported

## Wireless-g Broadband Router

1 WAN Port + 4 Ports Switch



### IP Sharing

The NAT/NAPT function lets you share the ADSL line to all the Intranet users (support up to 253 users). It also provides virtual server and virtual DMZ functions to let your internal servers be accessed from the Internet.

### Wireless Access Point

The wireless access point function can let your IEEE 802.11g/b wireless client devices access the Intranet through this router.

### Supports Special Applications

The router can let you setup trigger ports of special applications, and let you utilize Internet services smoothly.

### Anti-DoS SPI Firewall

The SPI (Stateful Packet Inspection) firewall can protect your Intranet PCs from illegal access and many kinds of DoS attacks from the Internet, and alert you by e-mail in the first time if some event happens. It also provides Internet access control function.

### Virtual Server and DMZ

The virtual server and DMZ function let you setup your servers in the Intranet and still can provide services to the Internet users.


### DHCP

Automatically assign IPs to the Intranet PCs.

### Web Configuration

You can configure the router through the friendly Web user interface with a browser.



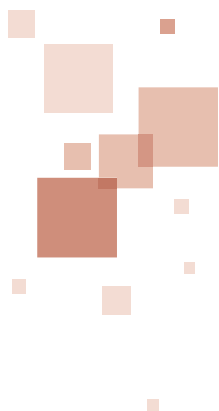

## Features

- NAT/NAPT IP Sharing
- SPI Anti-DoS Firewall
- Virtual Server/DMZ
- Supports 64/128 Bit Key Length WEP Encryption
- Supports Special Applications (Port Triggers)
- Supports DDNS (DynDNS, TZO)
- VPN Pass Through (IPSec/PPTP)
- Obtain WAN IP by PPPoE/Static IP/PPTP/DHCP/L2TP
- Supports WDS, DHCP Server
- Web User Interface (Remote Configuration)
- System Status (Port Connectivity, DHCP MAC/IP Mapping)
- Security Log, Firmware Upgrade

## Specification

Product	BR-6204Wg
CPU	Realtek RTL8186
Switch	Realtek RTL8305SC (5 Port Switch)
RF	Realtek RTL8225
Flash	2 MB NOR Flash
RAM	16 MB SDRAM
WAN Port	10/100M UTP Port x 1
LAN Ports	10/100M UTP Port x 4
Antenna	RP-SMA Detachable Antenna
Power	12V DC, 1A Linear Power Adaptor
Dimension	30(H)*187(W)*100(D) mm
Temperature	10~40 °C
Humidity	10~90% (Non-Condensing)
Certification	FCC Class B, CE Mark, C-Tick

Taiwan / Headquarters  
Edimax Technology Co., LTD.  
TEL:886-2-7739-6888  
FAX:886-2-7739-6887  
sales@edimax.com.tw

China  
Beijing Edimax Science &  
Technology Co., LTD.  
TEL:8610-6213-9288  
FAX:8610-6213-9231  
sales@edimax.com.cn

U.S.A.  
Edimax Computer Company  
TEL:1-408-496-1105  
FAX:1-408-980-1530  
sales@edimax.com

Latin America  
TEL:1-786-845-8099  
FAX:1-786-331-8490  
sales\_latinamerica@edimax.com

Europe  
Edimax Technology Europe B.V.  
TEL:31-499-377344  
FAX:31-499-372647  
sales@edimax.nl

U.K.  
Edimax Technology (UK) Ltd.  
TEL:44-870-7740226  
FAX:44-870-7740227  
info@edimax.co.uk

