



## Multi-homing Broadband Router

### Multi-homing

With the multi-homing function, you can lease up to 4 different types of WAN lines (T1、xDSL、Cable) from different ISPs. The router can let each user in your office make use of all of the WANs simultaneously without changing any configuration of his/her PC. The router can dynamically direct each of the LAN clients to a suitable WAN line according to the max bandwidth and current loading of the WAN lines. You also can configurate a WAN line to act as a backup to another one. This backup WAN line is not active in the beginning. When the other WAN line fails, the system will activate the backup WAN line and redirect the network traffic to the backup WAN line

### Anti-DoS SPI Firewall

The SPI (Stateful Packet Inspection) firewall can protect your Intranet PCs from illegal access and many kinds of DoS attacks from the Internet, and alert you by e-mail in the first time if some event happens. It also provides Internet access control function.


### Virtual Server and DMZ

The virtual server and DMZ function let you setup your servers in the Intranet and still can provide services to the Internet users.

### Web Configuration

You can configure the router through the friendly Web user interface with a browser.



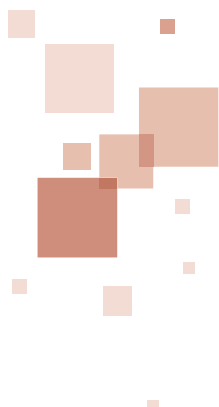

## Features

- NAT/NAPT IP Sharing
- Obtains WAN IP by PPPoE/Static IP/PPTP/DHCP/L2TP
- Multi-Homing – WAN Port Load Balancing and Failover
- SPI Anti-DoS Firewall
- Virtual Server
- Virtual DMZ
- Supports DDNS (DynDNS/TZO)
- Supports Special Applications (Port Triggers)
- VPN Pass Through (IPSec/PPTP/L2TP)
- DHCP Server
- Web User Interface (Remote Configuration)
- System Status (Port Connectivity)
- Security Log
- Firmware Upgrade

## Specification

Product	BR-6524K	BR-6541K
CPU	ADMtek 5120 (175MHz MIPS R4000)	
Throughput	54 Mbps	
WAN Ports	10/100M UTP Port x 2	10/100M UTP Port x 4
LAN Port	10/100M UTP Port x 4	10/100M UTP Port x 1
Weight	270g	
Power	12V DC, 1A Linear Power Adaptor	
Dimension	30(H)*187(W)*100(D) mm	
Temperature	10~40 °C	
Humidity	10~90% (Non-Condensing)	
Certification	FCC Class B, CE Mark, C-Tick	

### Edimax Worldwide

Taiwan/Headquarters  
Edimax Technology Co. Ltd.  
TEL : 886-2-22995648  
FAX : 886-2-22995647  
E-mail : service@edimax.com.tw

China  
Beijing Edimax Science  
& Technology Co., Ltd.  
TEL : 8610-82665568  
FAX : 8610-82665325  
E-mail : support@edimax.com.cn

USA  
Edimax Computer Company  
TEL : 1-408-496-1105  
FAX : 1-408-980-1530  
E-mail : support@edimax.com

Latin America  
Edimax Latin America  
TEL : 1-786-845 8099  
FAX : 1-786-331 8490  
E-mail : sales\_latina@edimax.com

Europe  
Edimax Technology Europe B.V.  
TEL : 31-499-377344  
FAX : 31-499-372647  
E-mail : support-europe@edimax.com.tw

U.K.  
Edimax Technology (UK) Ltd.  
TEL : +44-(0)-1908-255881  
FAX : +44-(0)-1908-255700  
E-mail : support-uk@edimax.com.tw

