

How to Connect SP-1101W to Router with “WEP” Encryption

Step 1. Reset SP-1101W

Press and hold “Reset” button 3~5 seconds and the “Network” LED will be “Red” and flash once time per second.




Step 2. Connect SP-1101W

Connect your Laptop or PC (Windows System) to smart plug SP-1101W through Wi-Fi. The SSID of SP-1101W is “**EdiPlug.Setup**” without password.

- Click on the Wireless Icon ()




- Select SSID “**EdiPlug.Setup**”

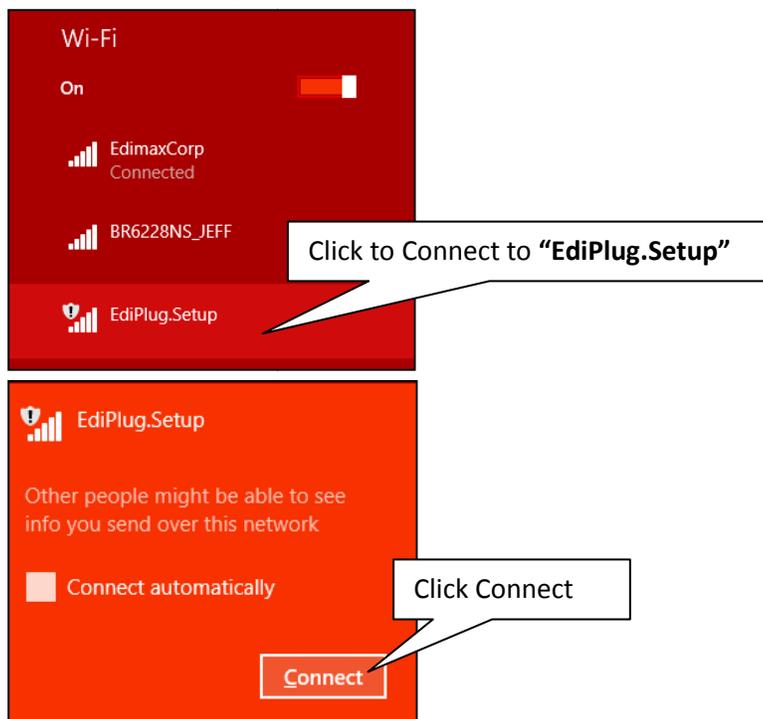

Step3. Open Browser (Internet Explorer) and enter SP-1101W page

- Enter “<http://192.168.20.3:10000/tnupgrade.html>” on the address bar.

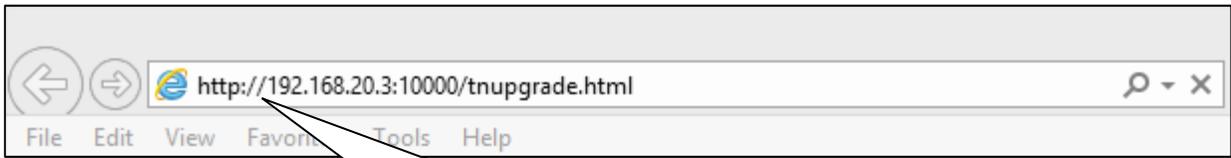


Enter URL Address here

- Enter default User Name (**admin**) and Password (**1234**)




Enter default User name and Password here

Step 4. Select Firmware file (v1.08) and then click “APPLY” to start upgrade process

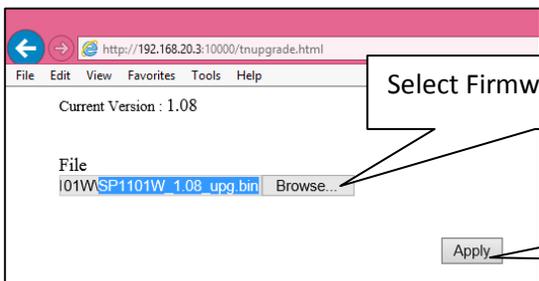


Select Firmware V1.08

Then click OK to continue

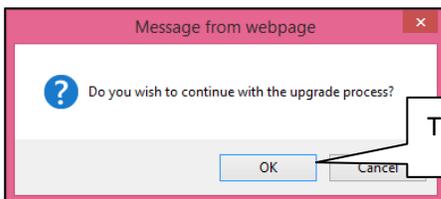

Then click Apply

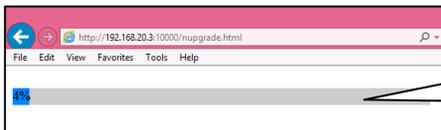

Upgrade in progress

Step 5. Reset SP-1101W

After finish the upgrade process, please press and hold “Reset” button at least 10~15 seconds to reset all the settings.



Step6. Upgrade Complete

Upgrade process will be completed when the “Network” LED is “Red” and flash once time per second.

Now, you can follow SP-1101W Quick Installation Guide to setup SP-1101W with your router (**WEP encryption**)

