



How to upgrade the firmware of IC-3015Wn.

1. Download the firmware v1.7 from www.edimax.com site. Extract the zipped file to get the firmware file: *IC3015WN_EDIMAX_1.7_upg.bin*
2. Click on Start >> All Programs >> Internet Camera >> run the EdiView Finder Program

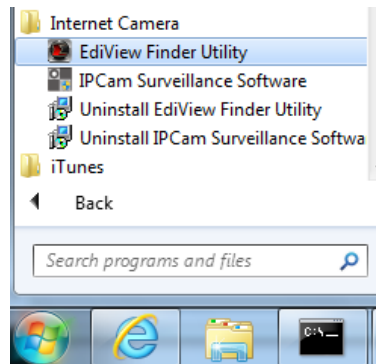

3. Find the IP address of IC-3015Wn". Close the EdiView Finder program.

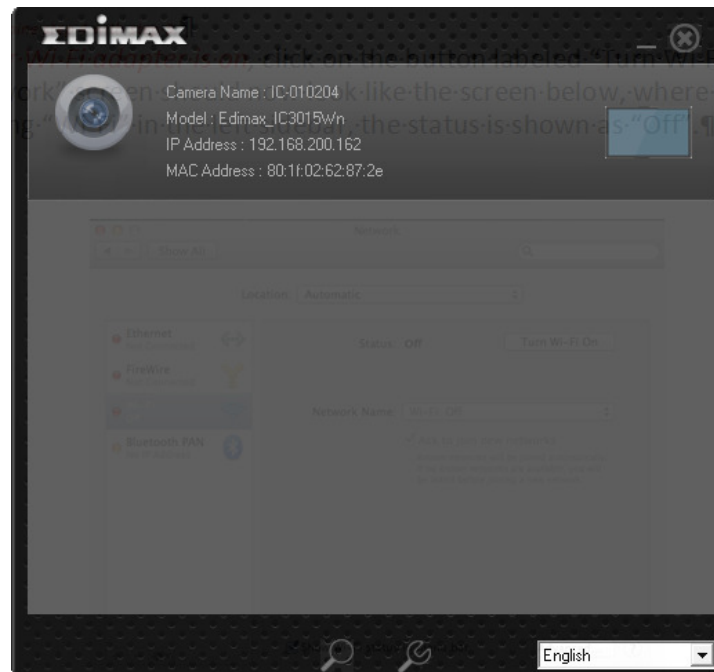


4. Open Internet Explorer and enter the IP address of your IC-3015Wn. Default username is admin. Default password is 1234.




Go to Setup >> Status – System Information. The current firmware is v1.6.


5. Go to System >> Advanced. Under Upgrade Firmware, click on Browse.

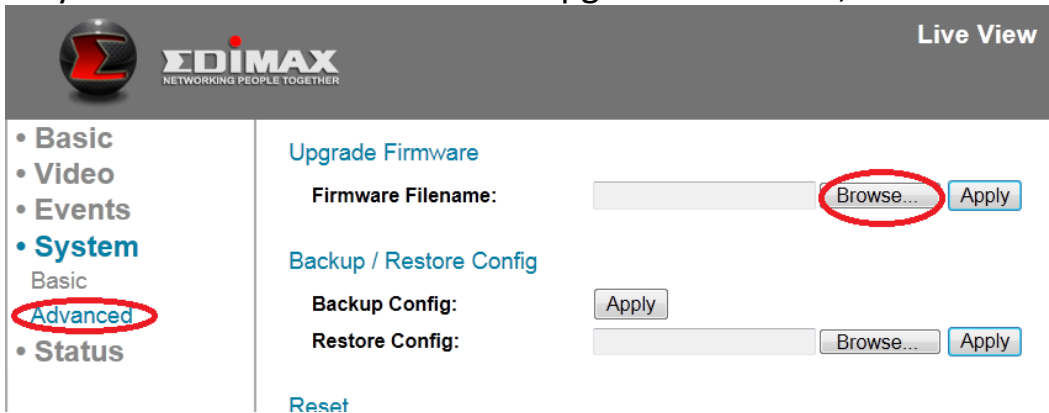


In Browse window, find the firmware file. Click on Apply.

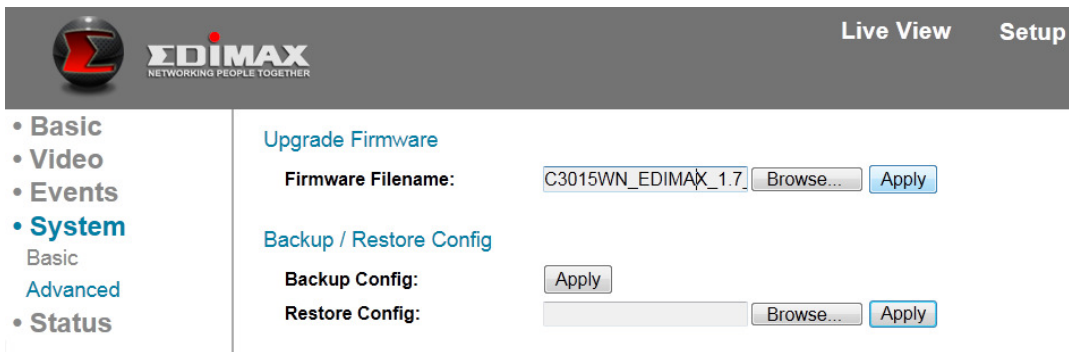

The upgrade is processing.

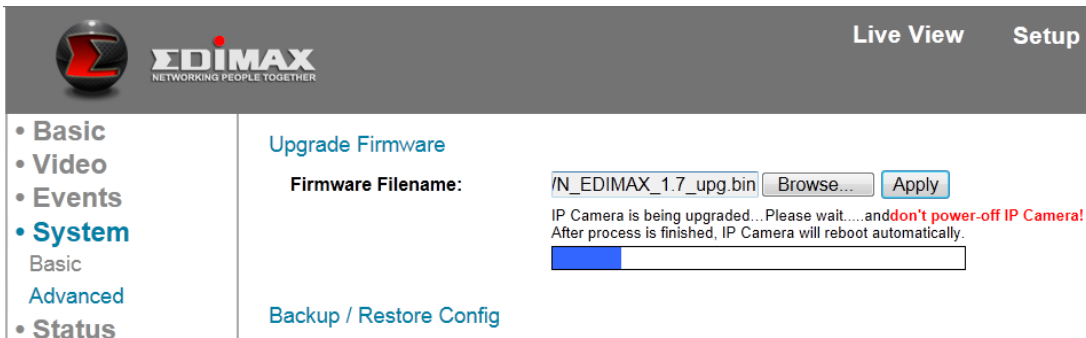


6. Camera is rebooting.

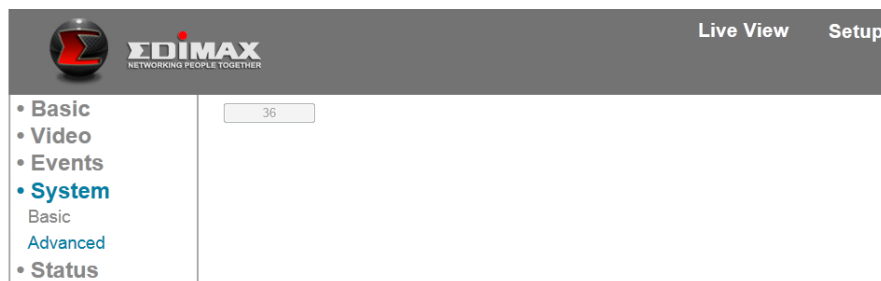

7. Click OK.



8. Verify the firmware version in System Information. IC-3015Wn uses the new firmware.

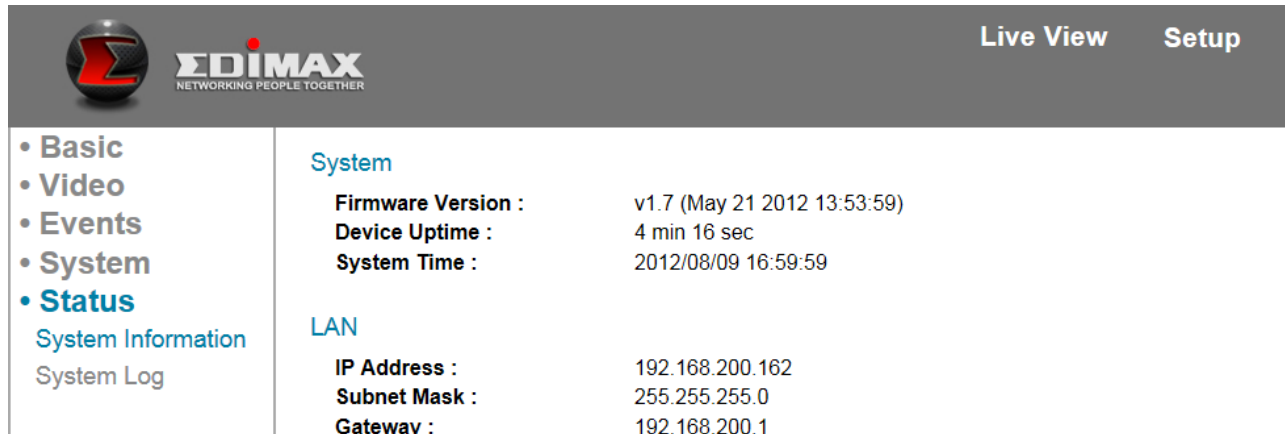

9. Firmware upgrade is completed.